

## Veedol SWIFTPOWER 70 5W-30 SP/MA2

Engine Power Retention – Power That lasts Every Ride

### Product Description:

Veedol SWIFTPOWER 70 5W-30 SP/MA2 is a NextGen fully synthetic motorcycle oil powered by EstoBioLide™, a unique bio-inspired technology delivering unmatched lubricity, superior cleanliness, and longer oil life.

Formulated with advanced polymer chemistry, it ensures consistent acceleration, power retention, and engine protection even under extreme riding conditions.

### Performance Specifications:

Veedol SWIFTPOWER 70 5W-30 SP/MA2 meets and exceeds below performances

- API SP
- JASO MA2 (T903: 2023)

### Application:

- Modern 4-stroke motorcycles of leading OEMs – Hero, Honda, Yamaha, Bajaj, TVS, etc.
- Motorcycles with or without integrated gearbox.
- Suitable for air- and water-cooled engines.
- Recommended for BS VI engines with catalytic converters.

### Features/Benefits:

- **Engine Power Retention:** Advanced EstoBioLide™ chemistry resists viscosity breakdown and maintains power throughout the drain interval.
- **Fuel Efficiency:** High shear stability ensures optimum lubrication, delivering improved mileage in city and highway riding.
- **Acceleration & Riding Pleasure:** Special friction-control molecule along with EstoBioLide™ ensures instant throttle response, smoother gear shifts, and stronger pickup under load and traffic conditions.
- **Engine Cleanliness:** Keeps pistons, valves, and combustion chambers up to 62% cleaner than conventional oils, supporting efficient combustion.



#### STORAGE

All packages should be stored under cover. It should not be exposed to direct sunlight, intense cold and extreme temperature fluctuations. Where outside storage is unavoidable, drums should be laid horizontally or properly covered to avoid the possible ingress of water and damage to drum markings.



#### HEALTH, SAFETY AND ENVIRONMENT

The information on this product is available in the Material Safety Data Sheet (MSDS) as a guide to the precautions and safe handling of this product and its disposal. For further information, we recommend you review the MSDS. If handled correctly, there are no special precautions suggested.

### Typical Properties:

| Test Parameters             | Unit              | ASTM Test Method | Typical results |
|-----------------------------|-------------------|------------------|-----------------|
| Appearance                  | -                 | Visual           | Clear & Bright  |
| ASTM Colour                 |                   | D 1500           | L2.0            |
| Density @ 29.5 °C           | g/cm <sup>3</sup> | D 4052           | 0.8429          |
| Kinematic Viscosity @ 40°C  | cSt               | D 445            | 57.25           |
| Kinematic Viscosity @ 100°C | cSt               | D 445            | 9.662           |
| Viscosity Index             |                   | D 2270           | 153             |
| Total Base Number           | mgKOH/g           | D 2896           | 7.23            |
| Pour Point                  | °C                | D 97             | -33             |
| Flash Point                 | °C                | D 92             | 233             |

### Proof Of Performance:

#### Unmatched Cleanliness Performance:




**Competitor A**



**SWIFTPOWER 76 5W-30 SP/MA2**

#### Special friction-control chemistry minimizes power loss:

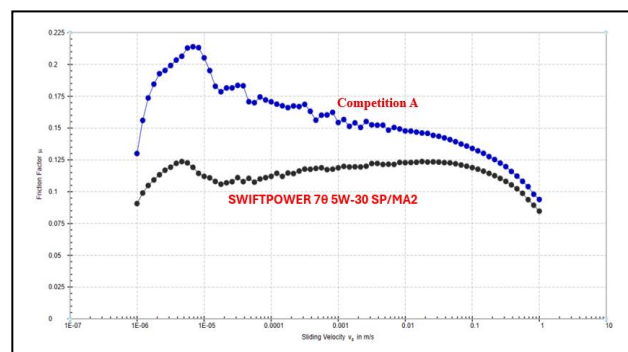

The above typical properties are those obtained with normal production tolerance and do not constitute a specification. Variations that do not affect product performance are to be expected during normal manufacture and at different blending locations. The information contained herein is subject to change without notice.



#### STORAGE

All packages should be stored under cover. It should not be exposed to direct sunlight, intense cold and extreme temperature fluctuations. Where outside storage is unavoidable, drums should be laid horizontally or properly covered to avoid the possible ingress of water and damage to drum markings.



#### HEALTH, SAFETY AND ENVIRONMENT

The information on this product is available in the Material Safety Data Sheet (MSDS) as a guide to the precautions and safe handling of this product and its disposal. For further information, we recommend you review the MSDS. If handled correctly, there are no special precautions suggested.

**STORAGE**

All packages should be stored under cover. It should not be exposed to direct sunlight, intense cold and extreme temperature fluctuations. Where outside storage is unavoidable, drums should be laid horizontally or properly covered to avoid the possible ingress of water and damage to drum markings.

**HEALTH, SAFETY AND ENVIRONMENT**

The information on this product is available in the Material Safety Data Sheet (MSDS) as a guide to the precautions and safe handling of this product and its disposal. For further information, we recommend you review the MSDS. If handled correctly, there are no special precautions suggested.