

VEEDOL RUSPRO DWX 32

DE-WATERING RUST PREVENTIVE OIL

ADVANCED SURFACE PROTECTION

Performance Features & Benefits



After Moisture removal Ruspro DWX 32 leaves behind a protective rust inhibiting layer, provides long term protection.



It is non-hazardous, non-toxic and non-polluting.



Formulated using excellent anti-corrosive additives.



Good dewatering properties avoid entrapment of water which could lead to corrosion.



It provides excellent protection to ferrous and non-ferrous components even in severe conditions.



Once the machined component is applied with Veedol Ruspro DWX 32 an immediate action of protective film formation starts. This creates an effective rust preventive barrier.

Outdoor Protection



In ordinary industrial atmosphere, the treated components will remain rust free for 6 to 9 Months.

Indoor Protection



10 to 18 Months.

Product Description

Veedol Ruspro DWX 32 is a highly effective solvent-based corrosion preventive oil with good de-watering properties. The product on evaporation of the solvent leaves behind a soft greasy protective rust inhibiting layer. Veedol Ruspro DWX 32 is free from heavy metals, such as Barium – improves environmental profile and helps reduce waste disposal cost.

Product Advantages


- Veedol Ruspro DWX 32 has better Salt Spray characteristics, indicate excellent rust protection.
- Higher coverage area ensures less consumption.
- Better film thickness indicates uniform film strength.
- Ideal for protection of machined components prior to storage or transportation.



Typical Properties

Appearance	Clear Brown Liquid
Film Coverage, sq. mt. / ltr	45
Film Thickness, microns	4 to 6
Salt Spray Characteristics, hours (ASTM B 117)	80
Flash Point, OC (ASTM D 92)	47
Water Displacement Test (De-Watering)	Passes
Protection – Indoor	18 months
Protection – Outdoor	9 months

The above typical properties are those obtained with normal production tolerance and do not constitute as specification. Variations that do not affect product performance are to be expected during normal manufacturing processes and at different blending locations. The information contained herein is subject to change without notice.

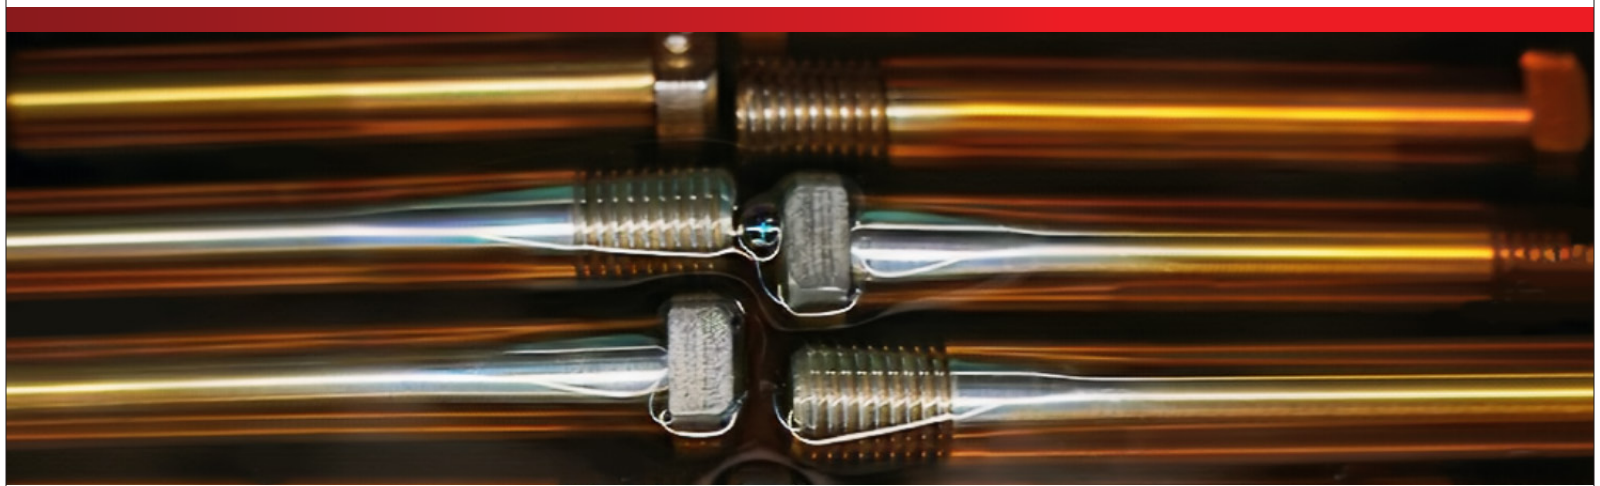

VEEDOL RUSPRO DWX 32

DE-WATERING RUST PREVENTIVE OIL

ADVANCED SURFACE PROTECTION

Method of Application

- » Veedol Ruspro DWX 32 is best applied by dipping, however, spraying or brushing are also suitable.
- » The machined components, free of foreign matter, are directly dipped/immersed into Ruspro DWX 32 for a short time and taken out.
- » The moisture from the components settles at the bottom and the film formation takes place.
- » The components not having any moisture can also be dipped to get rust preventive coating (shot blasted castings).
- » Spraying should be at low to moderate pressure to ensure formation of a rust preventive film.
- » Brush quickly on the surface and ensure a rust preventive film is formed.
- » Before the treated work piece is handled or wrapped, time must be allowed for the solvent to evaporate and the film to dry.
- » These components are now ready for packing.
- » The protective film, if required, can be removed by wiping off.

Storage



All packages should be stored under cover. It should not be exposed to direct sunlight, intense cold and extreme temperature fluctuations. Where outside storage is unavoidable, drums should be laid horizontally or properly covered to avoid the possible ingress of water and damage to drum markings

Health, Safety and Environment




The product should be handled carefully. It is a highly flammable and a potential skin and eye irritant. Special care should be taken when spraying, as misted product greatly increases the risk of fire. Use only in a well-ventilated area away from sources of ignition including static discharge. For further information, we recommend you refer to the MSDS. Do not discharge the used product into drains, soil, or water. Take care to protect the environment.

Veedol Ruspro DWX 32 – Key Differentiators


Market General Grade

Veedol RUSPRO DWX 32

SALT SPRAY CHARACTERISTICS



Indicates very low rust protection



Indicates excellent rust protection

STACK STAIN TEST

RUST PROTECTIVE LAYER GETS DAMAGED DUE TO HIGH LOAD AND PRESSURE



Market General Grade



Veedol RUSPRO DWX 32

DEWATERING AND DEMULSIBILITY COMPLETE WATER SEPARATION IN SHORT DURATION



Market General Grade



Veedol RUSPRO DWX 32

Ruspro DWX 32 allows faster water separation as compared to market general product