



SWIFTPOWER 7 α

4T | 10W-50 | SP | MA2

INTRODUCING
NEXT-GEN
FULLY SYNTHETIC



Track Tested, Road-Ready Power, Protection & Performance

Product Description

Veedol SWIFTPOWER 7 α 10W-50 SP/MA2 is a Next-Gen fully synthetic motorcycle oil powered by EstoBioLide™, a next-gen bio-inspired lubricity booster designed for high-performance sport bikes.

Its cutting-edge formulation provides unmatched power retention, acceleration and engine cleanliness while ensuring smooth gear shifts and wet clutch reliability. Engineered with exceptional thermal stability and deposit control, it delivers the confidence to push limits-ride after ride.

Features/Benefits



Engine Power Retention: Advanced EstoBioLide™ technology resists viscosity breakdown under high RPM, ensuring consistent performance throughout the drain interval.



Acceleration Performance: Instant throttle response and smooth power delivery across every gear-even under heavy load and stop-go traffic.



Engine Cleanliness: Keeps pistons and valves up to 62% cleaner than conventional oils, supporting efficient combustion over extended riding periods.



Extended Oil Drain Interval: Engineered to handle extreme heat & high RPM riding, protecting against oil thickening and ensuring long-lasting performance.



Track Tested, Road Ready: Delivers superior wet clutch compatibility, smoother shifts and high-load durability for sport and touring motorcycles.



Heat & Wear Protection: Maintains a strong oil film at high RPMs and temperatures, protecting critical components for longer engine life.

Proof Of Performance

Unmatched Cleanliness Performance



COMPETITOR A



SWIFTPOWER 7 α 10W-50 SP MA2



STORAGE

All packages should be stored under cover. It should not be exposed to direct sunlight, intense cold and extreme temperature fluctuations. Where outside storage is unavoidable, drums should be laid horizontally or properly covered to avoid the possible ingress of water and damage to drum markings.



HEALTH, SAFETY AND ENVIRONMENT

The information on this product is available in the Material Safety Data Sheet (MSDS) as a guide to the precautions and safe handling of this product and its disposal. For further information, we recommend you review the MSDS. If handled correctly, there are no special precautions suggested.

Performance Specifications

Veedol SWIFTPOWER 7 α 10W-50 SP/MA2 meets and exceeds below performances

- API SP
- JASO MA2 (T903: 2023)

Application


- High-performance & modern 4-stroke motorcycles of leading OEMs-Honda, Yamaha, KTM, Royal Enfield, TVS, etc.
- Suitable for motorcycles with or without integrated gearbox.
- For air and water-cooled engines.
- Compatible with BS VI engines with catalytic converters.

Typical Properties

PROPERTIES	UNIT	ASTM TEST METHOD	TYPICAL RESULTS
Appearance	-	Visual	Clear & Bright
ASTM Colour		D 1500	L2.0
Density @ 29.5°C	g/cm3	D 4052	0.8460
Kinematic Viscosity @ 40°C	cSt	D 445	113.0
Kinematic Viscosity @ 100°C	cSt	D 445	17.24
Viscosity Index		D 2270	168
Total Base Number	mgKOH/g	D 2896	7.42
Pour Point	°C	D 97	-30
Flash Point	°C	D 92	242

The above typical properties are those obtained with normal production tolerance and do not constitute a specification. Variations that do not affect product performance are to be expected during normal manufacture and at different blending locations. The information contained herein is subject to change without notice.

Special friction-control chemistry minimizes power loss

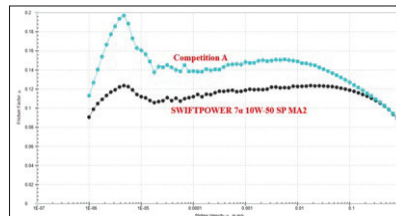

VEEDOL CORPORATION LIMITED
[formerly Tide Water Oil Co. (India) Limited]

Corporate Office: 902, Godrej TWO, Vikhroli, Eastern Express Highway, Mumbai-400 079.
Regd. Office: Yule house, 8, Dr. Rajendra Prasad Sarani, Kolkata-700 001, West Bengal, India.
www.veedolindia.com

Rev no.0, Date: 18.09.25